

## E-Z STACK PAD

### Submittal Information

Part No. 18042S-18074BS  
 Document No. SPEC18042S  
 Date 2024-12-31  
 Revision 10

### General Properties

- Material: PP (Polypropylene)
- Finish: Gray, Black
- Recommended temperature range: -25°F to 180°F
- Standard: ASTM D2299
- Application: Air conditioner outdoor units, Other lightweight equipment, etc.

### Specification



Item No.	Size (Inch.)	Part Size (Inch.)					Designed Load (lbs/kgs)	Max Load (lbs/kgs)	Corresponding Units	Std. Pkg.	U/M
		A	B	C	D	E					
18042S 18042BS	24X24X3	23 5/8	25 13/16	23 5/8	25 13/16	3	390/177	520/236	Only for 18000	70	EA
18044S 18044BS	30X30X3	29 7/8	31 7/8	29 7/8	31 7/8		660/290	880/400	18000/24000/30000	60	
18046S 18046BS	32X32X3	31 7/8	33 5/8	31 7/8	33 5/8		660/290	880/400	18000/24000/30000	54	
18048S 18048BS	36X36X3	35 7/8	37 5/8	35 7/8	37 5/8	810/367	1080/490	24000/30000/36000/42000	43		
18049S 18049BS	40X40X3	39 7/8	42	39 7/8	42	930/421	1240/562	36000/42000/48000/54000	42		
18050S 18050BS	18X38X3	17 5/8	19 1/2	37 5/8	39 1/2	390/177	520/236	Most under 36000 mini-splits	90		
18052S 18052BS	24X36X3	35 7/8	38	23 5/8	25 1/2	420/190.5	560/254	All mini-splits	76		
18070S 18070BS	24X48X3	23 13/16	26	47 13/16	50	750/341	1000/453	Ductless AC units	50		
18072S 18072BS	36X48X3	47 7/8	50	35 7/8	38	750/341	1000/453	Ductless AC units/ Packaged Heat Pump	38		
18074S 18074BS	30X40X3	30	42 3/8	40	32 1/4	810/367	1080/490	All mini-splits/Ductless AC units/ Packaged Heat Pump	46		

### Features

- The excellent one-piece structure design makes the bottom surface have more contact with the ground, making the product not easy to sink.
- Sturdy stiffener rib design enables the product to have better load-bearing performance, which can meet the needs of most air conditioners on the market.
- Offers vibration, fire, and noise resistance, along with UV, weather, chemical, and insect resistance.
- The special texture on the surface makes the product have a non-slip effect.
- Hole-free design prevents the equipment from operating normally due to weeds growing upwards.
- Nestable design reduces storage space and transportation costs.

### Installation Tips

- When using this product outdoors, place it on a flat foundation of dirt or small gravel, to reduce the impact of vibration on the operation of the equipment.
- Although this product has flame-retardant properties, it is best to keep this product away from the open flame. Long-term exposure to the open flame will cause the product to deform and affect the function of the product.

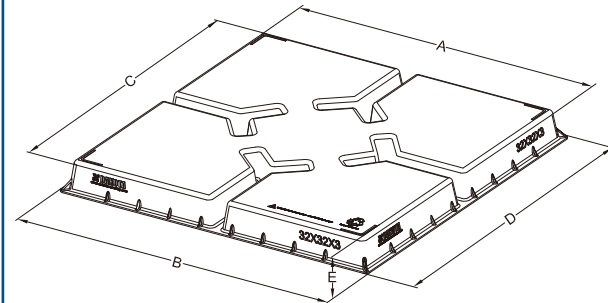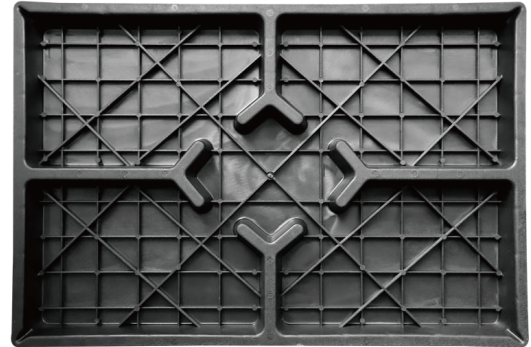

Patent No.: USD1,05,3618S