

## X15 MINI-SPLIT CONDENSATE PUMP

### Submittal Information

Part No.	18121
Document No.	SPEC18121
Date	2025-02-05
Revision	01

### General Properties

- Power supply: 100-240V AC 50/60Hz <4W
- Max.flow: 15L(3.96 gal)/H @ 0 head
- Sound level: <19dB(A) @ 1m (3.28 ft)
- Max.recommended head: 20m (65.62 ft)
- Max.suction lift: 2m (6.56 ft)
- Max.unit output: 28KW / 95,550 Btu/h
- Safety switch: 3A Normally closed
- Max.water temperature: 70°C (158°F)
- Discharge tube: 6mm (1/4 in) ID
- Class: II appliance
- Rated: Continuous
- IP Protection: IPX5
- Fully potted: ✓

### Specification


Item No.	Description	Std. Pkg	U/M
18121	X15 Mini-split Pump, Dual Vol, 3.9 GPH	1	EA

### Features

- Ultra Silent
- Easy Assembly
- Small Sizing
- Acceptable for indoor use only



### Accessories List

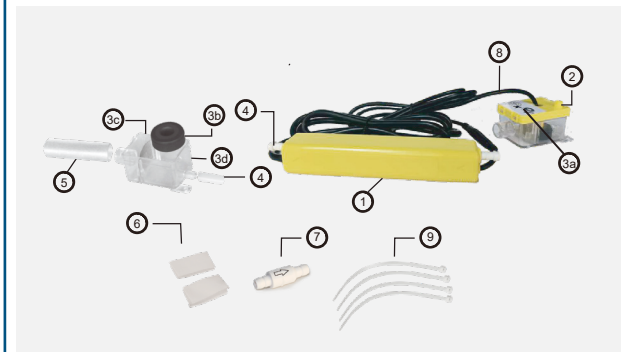

- |  |                                   |
|--|-----------------------------------|
| ① Assembled                              | ⑤ Inlet tube                      |
| ② 1/4 in ID vinyl tube                   | ⑥ 2 x self adhesive velcro strips |
| ③ Assembled Inline reservoir, including: | ⑦ Check valve                     |
| ③a lid & sensor cable                    | ⑧ Power cable                     |
| ③b float                                 | ⑨ 4 x 8 in x 3/16 in cable ties   |
| ③c filter                                |                                   |
| ③d reservoir                             |                                   |
| ④ 5 ft length of 1/4 in ID vinyl tube    |                                   |

**\*NOTE:**  
You will need several metres of 3/8 in OD x 1/4 in ID vinyl tube.

### Performance Data

