

METAL DISCONNECT SWITCHES

Submittal Information

Part No	15539-15541P
Document No.	SPEC15539
Date	2025-06-20
Revision	04

General Properties


Material:	Steel
Rating:	30 A / 60 A
Coil voltage:	120 V / 240 V
Types:	Non-Fused Metallic Disconnect Fused Metallic Disconnect
Color:	Gray
Phase:	1 phase and 3 phases
Usage:	Outdoor
Certificate:	UL Listed (cULus)

Applications

- Air Conditioners
- Heat Pumps
- Water Heaters
- Swimming Pools

Features

- Fusible and non-fusible combination wall-mounted power sockets can be easily and safely disconnected from the power supply as required.
- The clearly visible ON / OFF label eliminates guesswork and provides a clean, modern look.
- UL Listed (cULus), NEMA type 3R enclosure for outdoor use.
- Efficient and space-saving enclosure with unobstructed wiring troughs and easy removal of the lid and interior.
- Knockouts on back, bottom and sides offer a variety of configurations.
- The pull-out handle can store the "OFF" position in the compartment, helping to prevent the handle from being misplaced.
- Protective shield cannot be removed until the pullout handle is removed, disconnecting the power.

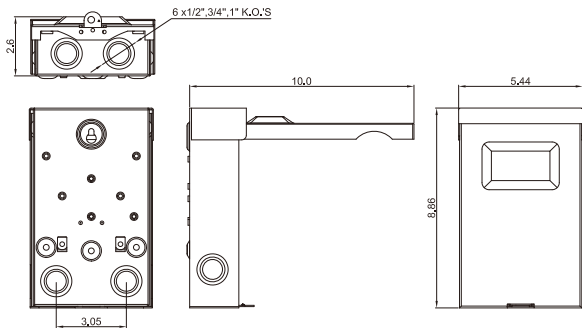

Product Structure

Item No.	Specifications	U/M	Std. Pkg.
15539	60A Non-Fused Metallic Disconnect	EA	6
15539P	60A Non-Fused Metallic Disconnect, 576/PK	PK	1
15540	30A Fused Metallic Disconnect	EA	6
15540P	30A Fused Metallic Disconnect, 576/PK	PK	1
15541	60A Fused Metallic Disconnect	EA	6
15541P	60A Fused Metallic Disconnect, 576/PK	PK	1